


**INDICATORE DI LIVELLO PER SCATOLA A RIFLESSIONE
C/INTERASSE VARIABILE - ACCIAIO C./INOX - PN 16-100**

1050

LEVEL GAUGE FOR REFLECTION HOUSING

WITH VARIABLE LENGTH - CARBON/STAINLESS ST. - 100-625 LBS

**WORKING
PRESSURES**
W.O.G. NON SHOCK
2000 p.s.i.

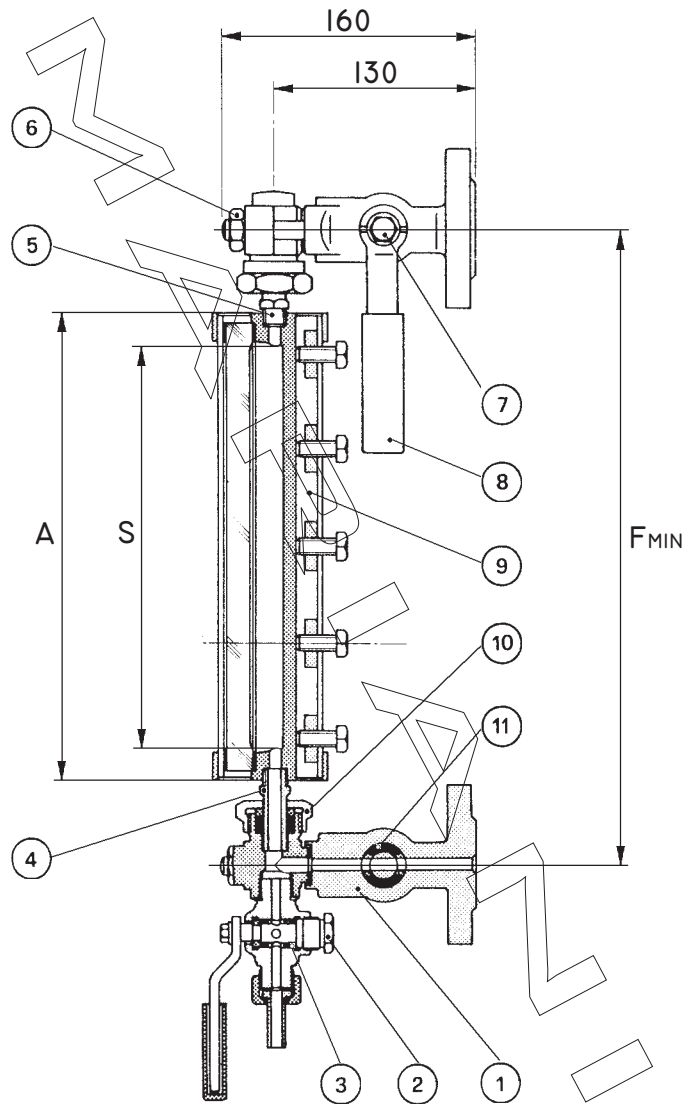

SIZE	F MIN	F MAX	A	S	L GLASS	Kg
1	260	310	155	115	140	9.9
2	285	335	180	140	165	10.2
3	310	360	205	168	190	10.5
4	340	390	235	195	220	11.2
5	370	420	265	225	250	11.7
6	400	450	295	255	280	12.2
7	440	490	335	295	320	12.9
8	465	515	360	315	340	13.4
205x2	515	565	410	373	190	13.8
235x2	575	625	470	433	220	15.2
265x2	635	685	530	493	250	16.1
295x2	695	745	590	553	280	17.2
335x2	775	825	670	633	320	18.6
360x2	825	875	720	673	340	19.6
265x3	910	950	795	758	250	20.6
295x3	1000	1040	885	848	280	22.2
335x3	1120	1160	1005	968	320	24.3
360x3	1195	1235	1080	1028	340	25.8
295x4	1295	1335	1180	1143	280	27.2
335x4	1455	1505	1340	1303	320	30.0
360x4	1555	1595	1440	1383	340	32.0
295x5	1590	1830	1475	1438	280	32.3
335x5	1790	1630	1675	1638	320	35.7
360x5	1915	1955	1800	1738	340	38.2
335x6	2125	2165	2010	1973	320	41.4
360x6	2275	2315	2160	2093	340	44.4
360x7	2635	2675	2520	2448	340	50.6

FLANGED ENDS: DIN 2501 PN 40 DN 20
ANSI-ASME 150-300 RF

OPTIONAL FEATURES: 1) WITH CAST IRON COUNTERBALANCE
(R.I.N.A. APPROVED)
2) POSITION FLOW INDICATOR

	DESCRIZIONE	DESCRIPTION	A (Carbon Steel)	INOX (Stainless Steel)
1	CORPO	BODY	ASTM A105	ASTM A182 F316
2	TAPPO	STOPPER	ASTM A194 2H	ASTM A194 2H
3	BOSSOLO	CASE	TECNOFREE 200	TECNOFREE 200
4	TUBETTO	PIPE	ASTM A182 F304	ASTM A182 F316
5	NIPPLO	NIPPLE	ASTM A105	ASTM A182 F316
6	DADO	NUT	ZINC PLATED STEEL	ZINC PLATED STEEL
7	VITE	SCREW	ZINC PLATED STEEL	ZINC PLATED STEEL
8	LEVA	LEVER	LAQUERED STEEL	LAQUERED STEEL
9	SCATOLA RIFLESSIONE	REFLECTION HOUSING	ASTM A105	ASTM A105
10	CALOTTA	SCREWED ENDS	ASTM A105	ASTM A182 F316
11	MASCHIO	PLUG	ASTM A182 F304	ASTM A182 F316

WHEN ORDERING, SPECIFY F_{min} DIMENSION.