


# 130

**INDICATORE DI PASSAGGIO  
A 1 CRISTALLO TEMPRATO  
C/ALETTE FISSE - FLANGIATO -  
BRONZO - PN 16**


**FLANGED FLOW INDICATOR  
WITH HARDENED SINGLE-GLASS  
AND FIXED VANES -  
BRONZE - 100 LBS**

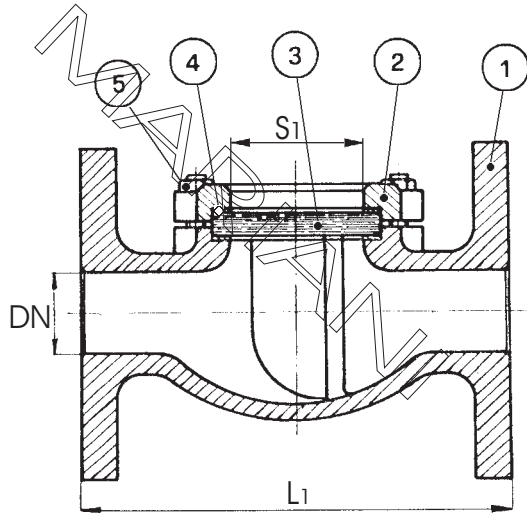

# 135

**INDICATORE DI PASSAGGIO  
A 2 CRISTALLI TEMPRATI  
C/ALETTE FISSE - FLANGIATO -  
BRONZO - PN 16**

**FLANGED FLOW INDICATOR  
WITH HARDENED DOUBLE-GLASS  
AND FIXED VANES -  
BRONZE - 100 LBS**

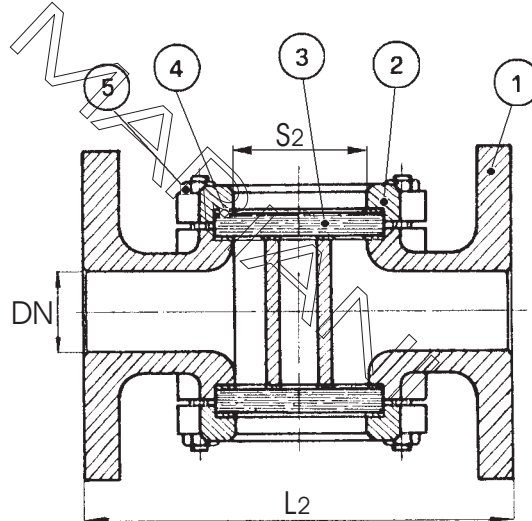

**WORKING  
PRESSURES**  
W.O.G. NON SHOCK  
**225 p.s.i.**

OPTIONAL FEATURES: 1)EXTRA-HARD BOROSILICATE GLASS (DIN7080)WORKING TEMPERATURE MAX=+300 °C(+572 °F)  
2)BALL FLOW INDICATOR IN MOPLEN WORKING TEMPERATURE MAX=+150 °C(+302 °F)

\*BRONZE ASTM B62 C83600=BS 1400 LG2=UNI 7013-8°

#BRASS ASTM B283=CuZn40Pb2 (UNI 5705/65)

	DESCRIZIONE	DESCRIPTION	MATERIAL
1	CORPO	BODY	BRONZE ASTM B62*
2	GHIERA	COVER	BRASS ASTM B283#
3	CRISTALLO	GLASS	HARDENED - GLASS WORKING TEMPERATURE = 100 °C /212 °F
4	VITE	BOLT	ASTM A193 B7
5	GUARNIZIONE	GASKET	FASIT 205 / 400

**FLANGED ENDS: ANSI B16.24 - 150 FF  
DIN 2501 PN 10-16**

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DN	15	20	25	32	40	50	65	80	100
L1	115	120	135	150	180	200	240	260	300
L2	110	120	135	150	180	200	240	260	300
S1	44	44	44	50	50	63	82	94	110
S2	44	44	44	50	50	63	82	94	110
Kg1	2	2	2.600	4.300	4.320	7.100	10.500	13	18
Kg2	2.500	2.800	3	4.800	5.700	9	12.300	16	22