


VALVOLA A SFERA - PASSAGGIO RIDOTTO - OTTONE - FF - PN 16

BALL VALVE - REDUCED BORE - BRASS - FF - 100 LBS

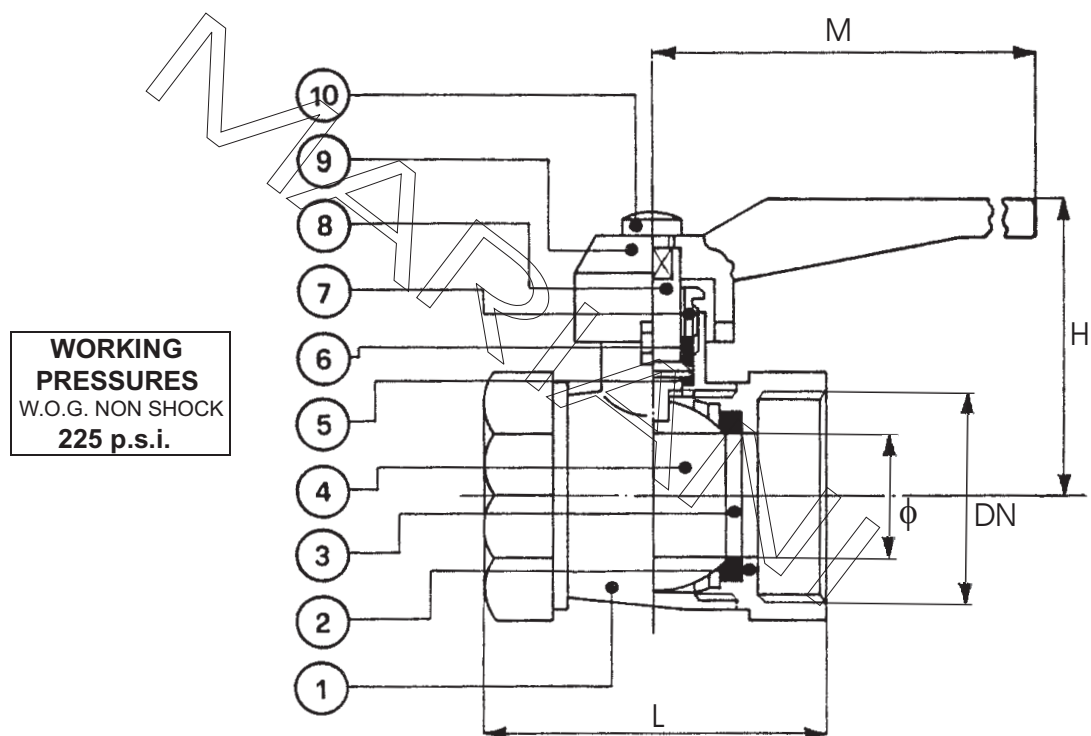

CONFORM TO: MSS SP 110

#BRASS ASTM B283=CuZn40Pb2 (UNI 5705/65)

OPTIONAL FEATURES: 1) BUTTERFLY HANDLE (≤1")

	DESCRIZIONE	DESCRIPTION	MATERIAL
1	CORPO	BODY	BRASS ASTM B283 - CHROME PLATED#
2	MANICOTTO	END PLUG	BRASS ASTM B283 - CHROME PLATED
3	SEGGIO	SEAT	P.T.F.E.
4	SFERA	BALL	BRASS ASTM B16 - HARD CHROME PLATED
5	SEDE ASTA	STEM SEAT	P.T.F.E.
6	GUARNIZIONE	GASKET	P.T.F.E.
7	PREMISTOPPA	THRUST WASHER	BRASS ASTM B16
8	ASTA	STEM	BRASS ASTM B16
9	LEVA	LEVER	ALUMINIUM ALLOY
10	VITE	LEVER SCREW	ZINC PLATED STEEL

THREADING: GAS (ISO 7/1 Rp) FEMALE PARALLEL

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"
φ	10	10	10	14	19	25	31	39	49	63	76	100	100
L	42	42	47	50	62	68	82	90	110	133	148	196	235
M	90	90	90	90	90	115	115	150	180	270	270	315	315
H	40	40	41	45	48	60	65	81	97	115	120	165	185
Kg	0.150	0.150	0.150	0.200	0.300	0.500	0.650	1	1.750	3	4.050	9.700	14