


VALVOLA A SFERA - SPLIT BODY - PASSAGGIO TOTALE - ACCIAIO C./INOX - ANSI 300
BALL VALVE - SPLIT BODY - FULL BORE - CARBON/STAINLESS ST.- ANSI 300

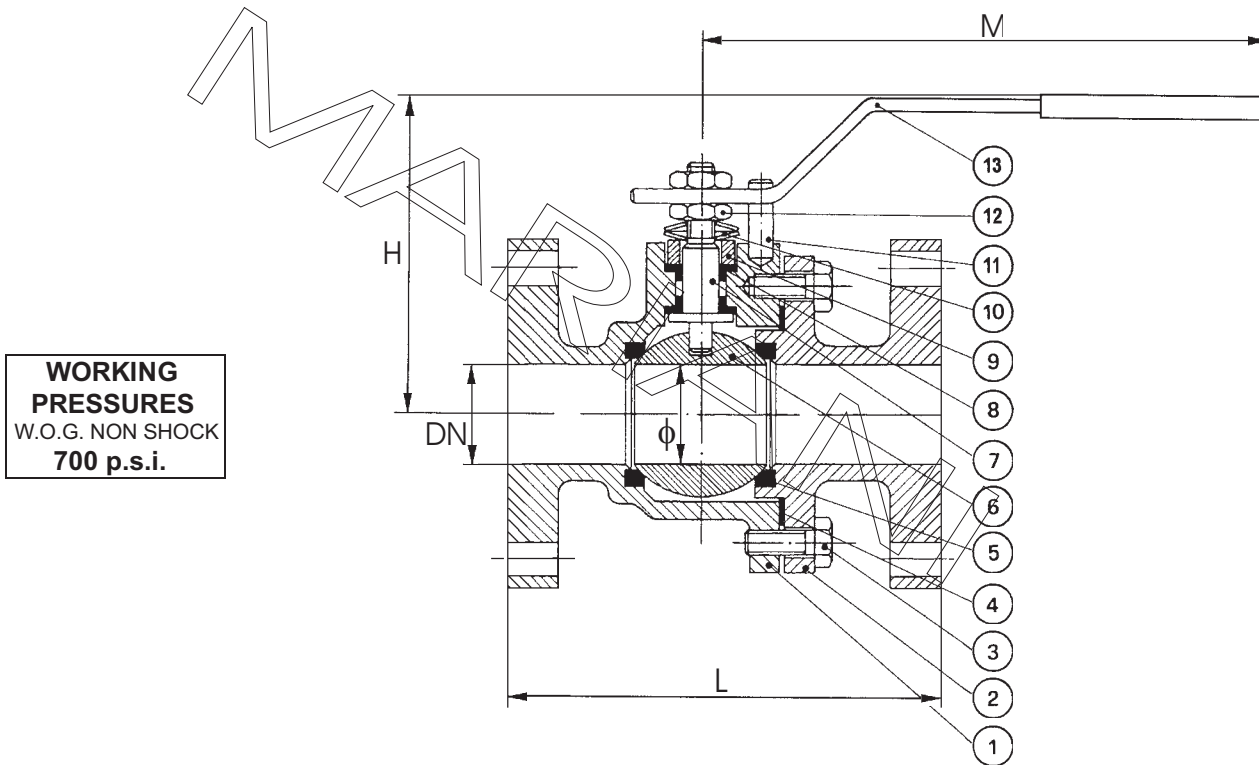

WORKING PRESSURES
W.O.G. NON SHOCK
700 p.s.i.

- OPTIONAL FEATURES:** 1)LOCKING DEVICE
2)EXTENDED WRENCH
3)MOUNTING PLATE DIN/ISO 5211
4)GEAR MANUAL OPERATOR
5)PNEUMATIC/ELECTRIC ACTUATOR
6)LIMIT SWITCHES

CONFORM TO: API STD 6D / BS 5351
FIRE SAFE API 607 / BS 6755
ANTISTATIC DEVICE BS 5146
LENGHT ANSI B16.10

	DESCRIZIONE	DESCRIPTION	A (Carbon Steel)	INOX (Stainless Steel)
1	CORPO	BODY	ASTM A105 / A216 WCB	ASTM A182 F316
2	FLANGIA	FLANGE	ASTM A105 / A216 WCB	ASTM A182 F316
3	TIRANTE	BOLTING	ASTM A193 B7	ASTM A193 B7
4	GUARNIZIONE	GASKET	GRAPHITE TEFLONED	GRAPHITE TEFLONED
5	SEGGIO	SEAT	P.T.F.E.	P.T.F.E.
6	SFERA	BALL	ASTM A182 F304	ASTM A182 F316
7	ASTA	STEM	ASTM A182 F304	ASTM A182 F316
8	SEDE ASTA	STEM SEAT	GRAPHITE TEFLONED	GRAPHITE TEFLONED
9	PREMISTOPPA	THRUST WASHER	ASTM A105	ASTM A182 F316
10	MOLLE A TAZZA	SPRING DISCS	ASTM A182 F304	ASTM A182 F304
11	FERMO	STOP	ASTM A193 B7	ASTM A193 B7
12	DADO - CONTRODADO	NUTS	ASTM A194 2H	ASTM A194 2H
13	LEVA	LEVER	CARBON STEEL	CARBON STEEL

FLANGED ENDS: ANSI-ASME B16.5 300 RF

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"
DN	15	20	25	32	40	50	65	80	100	125	150	200	250
ϕ	14	20	25	32	38	49	62	75	95	118	144	194	250
L	140	152	165	180	191	216	241	283	305	381	403	502	568
M	145	145	180	180	275	275	380	380	440	440	610	610	800
H	64	66	85	90	118	126	139	144	195	212	265	320	320
Kg	3	3.5	6	7	12	15	20	30	40	50	75	110	143