


**VALVOLA A SFERA - TIPO WAFER - C/CAMICIA RISCALDAMENTO -  
PASSAGGIO TOTALE - UNI/ANSI**

**BALL VALVE - WAFER TYPE - FULL JACKETED - FULL BORE - UNI/ANSI**

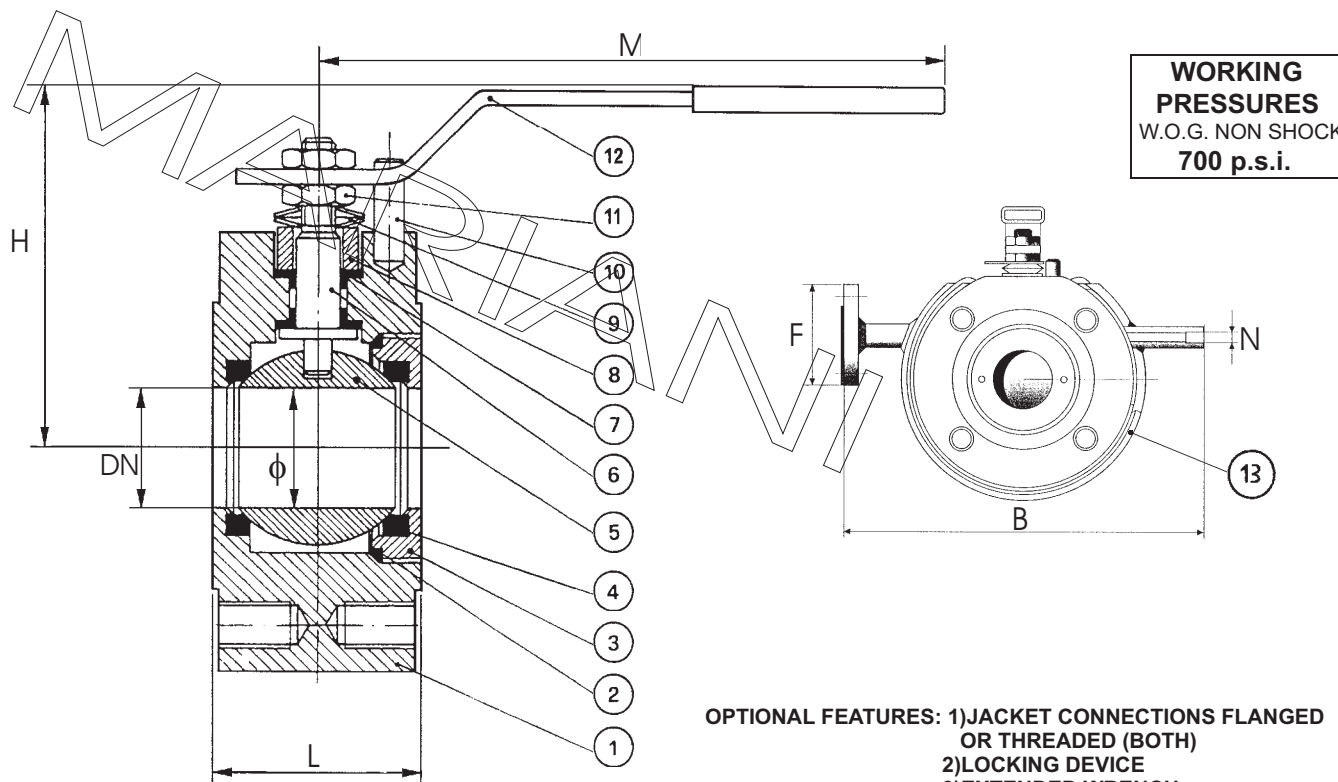

CONFORM TO: API STD 6D / BS 5351  
FIRE SAFE API 607 / BS 6755  
ANTISTATIC DEVICE BS 5146

- OPTIONAL FEATURES: 1) JACKET CONNECTIONS FLANGED OR THREADED (BOTH)  
2) LOCKING DEVICE  
3) EXTENDED WRENCH  
4) MOUNTING PLATE DIN/ISO 5211  
5) GEAR MANUAL OPERATOR  
6) PNEUMATIC/ELECTRIC ACTUATOR  
7) LIMIT SWITCHES

	DESCRIZIONE	DESCRIPTION	A (Carbon Steel)	INOX (Stainless Steel)
1	CORPO	BODY	ASTM A105	ASTM A182 F316
2	GUARNIZIONE	OR	VITON	VITON
3	MANICOTTO	END PLUG	ASTM A105	ASTM A182 F316
4	SEGGIO	SEAT	P.T.F.E.	P.T.F.E.
5	SFERA	BALL	ASTM A182 F304	ASTM A182 F316
6	ASTA	STEM	ASTM A182 F304	ASTM A182 F316
7	SEDE ASTA	STEM SEAT	GRAPHITE TEFLONED	GRAPHITE TEFLONED
8	PREMISTOPPA	THRUST WASHER	ASTM A105	ASTM A182 F316
9	MOLLE A TAZZA	SPRING DISCS	ASTM A182 F304	ASTM A182 F304
10	FERMO	STOP	ASTM A193 B7	ASTM A193 B7
11	DADO - CONTRODADO	NUTS	ASTM A194 2H	ASTM A194 2H
12	LEVA	LEVER	CARBON STEEL	CARBON STEEL
13	CAMICIA	JACKET	ASTM A106 Gr.B	ASTM A106 Gr.B

**FLANGED ENDS: ANSI-ASME 150-300 RF  
DIN 2501 PN 10-16-25**

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DN	15	20	25	32	40	50	65	80	100
φ	15	20	25	32	38	48	62	75	95
L	32	42	45	54	61	72	98	118	140
B	180	180	200	210	235	250	275	300	340
M	150	150	185	285	285	285	380	380	475
H	80	87	91	106	113	120	157	168	184
F	DN15	DN15	DN15	DN15	DN15	DN15	DN15	DN20	DN20
N	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"
Kg	4	4.5	6	7.5	10	12.5	20	27	38